

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 March 2002 (21.03.2002)


PCT

(10) International Publication Number
WO 02/023853 A3

- (51) International Patent Classification⁷: **H04L 12/28**, 29/06 (74) Agents: JAKOPIN, David, A. et al.; Pillsbury Winthrop LLP, 1600 Tysons Boulevard, McLean, VA 22102 (US).
- (21) International Application Number: PCT/US01/28705 (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date:
14 September 2001 (14.09.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/663,045 15 September 2000 (15.09.2000) US
- (71) Applicant: ATHEROS COMMUNICATIONS, INC.
[US/US]; 529 Almanor Avenue, Sunnyvale, CA 94085 (US).
- (72) Inventors: KUSKIN, Jeffrey, Scott; 2042 Cecelia Way, Mountain view, CA 94040 (US). NG, Tao-Fei, Samuel; 34377 Maybird Circle, Fremont, CA 94555 (US). DAVIDSON, Andrew, M.; 5334 Alan Avenue, San Jose, CA 95124 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- (88) Date of publication of the international search report:
21 November 2002

[Continued on next page]

(54) Title: HARDWARE MAC

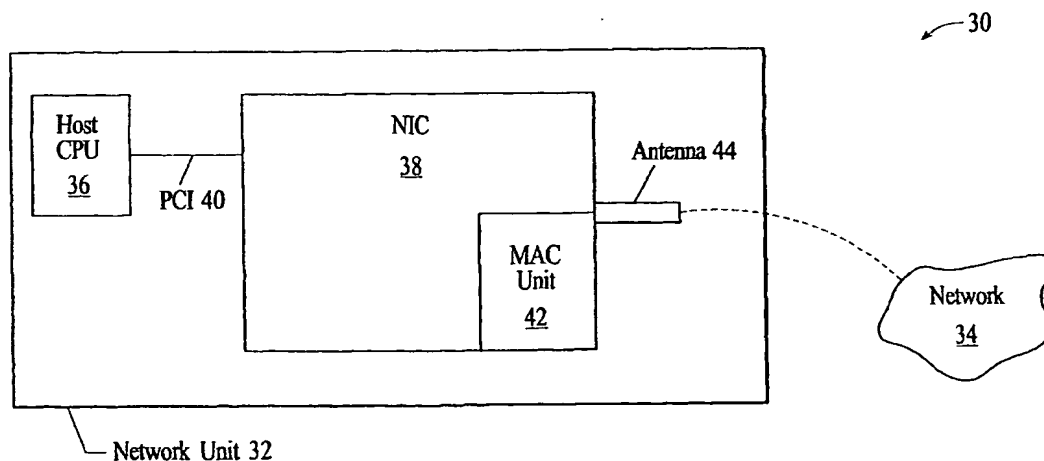

(57) Abstract: A Hardware MAC (Media Access Control) unit implements time-critical functions according the 802.11 standard for telecommunications, thereby enhancing system performance. The MAC layer includes three sub-layers: MLME (MAC Sublayer Management Entity), which connects the MAC unit with the host CPU, FTM (Frame Transition Manager), which connects the MAC unit with the network, and FLPM (Frame Level Protocol Manager), which internally connects the MLME sub-layer with the FTM sub-layer. In particular, the FLPM manager includes time-critical and non-time-critical functions that are customarily implemented in software on the MAC by a MAC CPU (Central Processing Unit). The hardware MAC implements time-critical FLPM functions in hardware on the MAC and implements non-time-critical FLPM functions in software on the host CPU so that requirements for processing software on the MAC preferably may be altogether eliminated or alternatively may be substantially reduced.



WO 02/023853 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.